



BOSCH



MADE TO GO BEYOND

Professional Power Tools

2020
Quick Reference Guide

Cordless Drills/Impact Drills

Bosch GO

The only smart screwdriver - A simple push. A perfect finish.



Technical data	3.6 V 0.31 kg
Order number:	0 601 9H2 ...
Torque settings: 5	
Torque, max. (hard/soft screwdriving): 5 Nm/ 2.2 Nm	
Max. screw diameter: 5 mm	
No-load speed (1st gear / 2nd gear): 0 - 360 rpm	
Chuck capacity: 6.35 mm	
Features: electronic brake, push start & press button, mechanical clutch	

GSR/ GSB* 120-LI

Bosch Quality, High Power, Affordable Price!



Technical data	12 V 0.8 kg/ 0.9 kg
Order number:	0 601 9G8 ...
Torque settings: 20+1	
Torque, max. (hard/soft screwdriving): 30 Nm/14 Nm	
Max. drilling diameter in (wood, steel, masonry): 20 mm, 10 mm, *8 mm	
Max screw diameter: 7mm	
Chuck capacity: 1.5 - 10 mm	
No-load speed: 0 - 400 / 0 - 1500 rpm	
Features: 2 gear, variable speed, LED light	

GSR 12 V-15 FC

Compact and flexible for any job in the 12 Volt class



HEAVY DUTY

Technical data	12 V 0.6 kg
Order number:	0 601 9F6 ...
Torque settings: 20+1	
Torque, max. (hard/soft screwdriving): 30 Nm/ 15 Nm	
Max. drilling diameter in (wood, steel): 30 mm, 10 mm	
No-load speed: 0 - 400/ 0 - 1300 rpm	
Max. screw diameter: 7 mm	
Chuck capacity: 10 mm	
Features: flexiclick system with integrated magnetic bit holder	

GSR/ GSB* 12 V-30

Impressive features, powerful results



HEAVY DUTY



Technical data	12 V 0.72/ 0.82* kg
Order number:	0 601 9G9 ...
Torque settings: 20+1/ *20+2	
Torque max (hard/soft screwdriving): 30 Nm/ 18 Nm	
Chuck capacity: 0.8 mm - 10 mm/ *1 mm - 10 mm	
Max. drilling diameter in (wood, steel, masonry): 20 mm, 10 mm, *8 mm	
Max screw diameter: 8 mm	
No-load speeds (1st gear/2nd gear): 0 - 420 rpm/ 1600 rpm	
Features: variable speed, 2 gear, LED light	

GSR/ GSB* 180-LI

More Power. More Robust



Technical data	18 V 1.8 kg
Order number:	0 601 9F8 ...
Torque settings: 20+2	
Torque, max. (hard/soft screwdriving): 54 Nm/ 21 Nm	
Max. drilling diameter in (wood, steel, masonry): 35 mm, 10 mm, *10 mm	
Chuck capacity: 1.5 - 13 mm	
Max. screw diameter: 10 mm	
No-load speed: 0 - 500/ 1900 rpm	
Features: variable speed, 2 gear, forward/reverse rotation, LED light	

GSR/ GSB* 18 V-50

Robust brushless motor for durability and flexibility



HEAVY DUTY



Technical data	18 V 1 kg/ 1.1 kg
Order number:	0 601 9H5 ...
Torque settings: 20+1	
Torque max (hard/soft screwdriving): 50 Nm/ 28 Nm	
Max drilling diameter in (wood, steel, masonry): 35 mm, 13 mm, *13 mm	
Max. screw diameter: 10 mm	
No-load speed (1st gear/2nd gear): 0 - 460 rpm/ 1800 rpm	
Chuck capacity: 1.5 - 13 mm	
Features: metal chuck, forward/reverse rotation, variable speed, LED light, coolpack, 2 gear, soft grip	

GSB 18 V-110 C

The most dynamic compact and versatile impact drill.



HEAVY DUTY



Technical data	18 V 1.8 kg
Order number:	0 601 9G0 ...
Torque max (hard/soft screwdriving): 110 Nm/ 85 Nm/ 47 Nm	
Torque settings: 25+1	
Max. drilling diameter in (wood, steel, masonry): 82 mm, 13 mm, 16 mm	
No-load speed (1st gear/2nd gear): 0 - 480 rpm/ 2100 rpm	
Max. screw diameter: 12 mm	
Chuck capacity: 1.5 mm - 13 mm	
Features: user interface, kickback control, precision clutch	

GBH 180-LI

Cordless hammer as powerful as corded now made affordable.



HEAVY DUTY



Technical data	18 V 2.3 kg
Order number:	0 611 911 ...
Impact energy: 2.0 J	
Impact rate at rated speed: 0 - 5100 bpm	
Drilling diameter (concrete, wood, steel): 20 mm, 13 mm, 30 mm	
Features: variable speed, forward/reverse rotation, rotation control clutch, soft grip, chisel function	

GBH 18 V-26 (F)

More power, more comfort and less dust



HEAVY DUTY



Technical data	18 V 3.5 kg
Order number:	0 611 910 ...
Impact energy: 2.6 J	
Impact rate at rated speed: 0 - 4350 bpm	
Drilling diameter (concrete, wood, steel): 26 mm, 13 mm, 30 mm	
Features: SDS plus, coolpack, kickback control, electronic precision control, vibration control, electronic motor protection, forward/reverse rotation, charge level indicator, LED light, soft grip, chisel function, autolock, vario lock, variable speed, constant speed, rotation control clutch, dust extraction	

GBH 18 V-34 C

The market's most powerful cordless SDS-Plus hammer



HEAVY DUTY



Technical data	18 V 5.9 kg
Order number:	0 611 914 ...
Impact energy: 6.0 J	
Impact rate at rated speed: 2900 bpm	
Drilling diameter in concrete: 6 - 32 mm	
Features: adaptive speed control (ASC), user interface, lock-on button together with OMS, kickback control, Electronic Precision Control (EPC), vibration control	

GBH 18 V - 36C/ 45C*

Cordless freedom with corded performance



HEAVY DUTY



Technical data	18 V 5.1 kg/ *0.8 kg
Order number:	0 611 915 .../ *0 611 913 ...
Impact energy: 7.0 J/ *12.5 J	
Impact rate at rated speed: 2900 bpm, *2720 bpm	
Drilling diameter in concrete: 12 - 36 mm, *12 - 45 mm	
Features: SDS max, kickback control, user interface, soft start, vibration control, LED light, rotation control clutch, Adaptive Speed Control (ASC), Electronic Precision Control (EPC), speed control	

GDX 180-LI

Powerful and robust Impact Driver, gets the job done faster!



HEAVY DUTY



Technical data	18 V 1.1 kg
Order number:	0 601 9G5 ...
Torque, max.: 180 Nm	
Impact rate: 0 - 3600 rpm	
No-load speed: 0 - 2800 rpm	
Screw diameter: M 6 - M 14	
Toolholder: 1/4" internal hexagon, 1/2" external square	

GDX 18 V-200 C

The most versatile and compact impact driver/wrench



HEAVY DUTY



Technical data	18 V 1.2 kg
Order number:	0 601 9G4 ...
Torque max.: 200 Nm	
Impact rate: 0 - 4000 bp	
No-load speed: 0 - 3400 rpm	
Toolholder: 1/4" internal hexagon, 1/2" external square	
Screw diameter: M 6 - M 16	
Features: speed selection, variable speed, soft grip, forward/reverse rotation, LED light, user interface	

GDS 250-LI

The affordable impact wrench with innovative auto-bolt release to increase your working efficiency!



Technical data	18 V 1.6 kg
Order number:	0 601 9G6 ...
Torque max.: 250 Nm	
Impact rate: 0 - 3300 rpm	
No-load speed: 0 - 2400 rpm	
Screw diameter: M 10 - M 18	
Tool holder: 1/2" external square	

GDS 18 V-LI HT

The most powerful 18 volt cordless impact wrench



HEAVY DUTY



Technical data	18 V 3.0 kg
Order number:	0 601 9B1 ...
Torque, max.: 650 Nm	
Rated impact rate: 0 - 2100 bpm	
No-load speed: 0 - 1900 rpm	
Toolholder: 1/2" external square	
Screw diameter: M 12 - M 20	
Features: forward/reverse rotation, soft grip, variable speed, speed selection	

Cordless Jigsaws

GST 12 V-LI

Extremely compact and lightweight



Technical data	12 V 1.5 kg
Order number:	0 601 5A1 ...
Stroke lengths: 18 mm	
Stroke rate (1st gear, 2nd gear): 1500 - 2800 spm	
Cutting depth in (wood, metal): 70 mm, 3 mm	
Mitre cuts: 0 - 45°	
Features: click & clean system, dust extraction, speed selection, pendulum action	

HEAVY DUTY

GST 18 V-LI

The most compact 18 volt professional cordless jigsaw



Technical data	18 V 2.4 kg
Order number:	0 601 5A6 ...
Stroke rate at no-load speed: 2700 spm	
Stroke height: 23 mm	
Mitre cuts: 0 - 45°	
Cutting depth in (wood, metal): 120 mm, 8 mm	

HEAVY DUTY

Cordless Recipsaws

GSA 12 V-LI

The smallest professional universal saw



Technical data	12 V 1.2 kg
Order number:	0 601 64L ...
Stroke lengths: 14.5 mm	
Stroke rate (1st gear, 2nd gear): 0 - 3000 spm	
Cutting depth in (wood, metal): 65 mm, 50 mm	
Features: charge level indicator, LED light, speed selection, soft grip	

HEAVY DUTY

GSA 18 V-LI

Best-in-class cutting performance



Technical data	18 V 3.4 kg
Order number:	0 601 64J ...
Stroke lengths: 28 mm	
Stroke rate (1st gear, 2nd gear): 2400 - 2700 spm	
Cutting depth in (wood, metal): 200 mm, 20 mm	
Features: electronic motor protection, SDS, electronic cell protection, soft grip	

HEAVY DUTY

Cordless Circular saws

GKS 12 V-LI

The smallest professional universal saw



Technical data	12 V 1.4 kg
Order number:	0 601 6A1 ...
No-load speed: 0 - 1 400 rpm	
Saw blade, bore diameter: 85 mm, 15 mm	
Max cutting capacity in wood at 45° and 90°: 17 mm, 26.5 mm	
Features: charge level indicator, guiderail compatible	

HEAVY DUTY

GKS 18 V-57

The battery-powered all-rounder for all robust sawing jobs



Technical data	18 V 4 kg
Order number:	0 601 6A2 ...
No-load speed: 0 - 3400 rpm	
Saw blade, bore diameter: 165 mm, 20 mm	
Max cutting capacity in wood at 45° and 90°: 39 mm, 57 mm	
Features: LED light, intelligent brake system	

HEAVY DUTY

GKS 18 V-68 GC

Best performance with full flexibility



Technical data	18 V 4.1 kg
Order number:	0 601 6B5 ...
No-load speed: ~2500...5000 rpm	
Saw blade, bore diameter: 190/30 mm	
Max cutting capacity in wood at 0°, 45° and 90°: 68/50/45 mm	
Features: innovative cutting depth adjustment, user interface (HMI), auxiliary handle	

HEAVY DUTY



GCM 18 V-216

Powerful but compact



Technical data	18 V 14.7 kg
Order number:	0 601 8A1 ...
No-load speed: 4600 rpm	
Cutting capacity at 0° and 45° incline: 70 x 270 mm, 45 x 270 mm	
Saw, diameter (blade, bore): 216 mm, 30 mm	
Mitre setting: 47°L / 47°R	
Features: EC, click & clean system	

HEAVY DUTY



Cordless Blowers

GBL 18 V-LI

Clean your jobsite in seconds



Technical data	18 V 1.1 kg
Order number:	0 601 9F5 ...
Max. air speed: 75 m/s	
Max airflow: 120 m³/h	
No-load speed: 17000rpm	
Runtime Speed I: 9min/Ah, Speed II: 5min/Ah	

HEAVY DUTY

Cordless Vacuum Cleaners

GAS 12 V-LI

The most powerful and compact cordless dust extractor



Technical data	12 V
Order number:	0 601 9E3 ...
Container volume: 0.35 L	
Filter surface area: 408 cm²	
Max ventilating pressure: 45 mbar	
Max airflow: 15 l/s	
Features: click & clean system, dust extraction	

HEAVY DUTY

GAS 18 V-LI

Cleaning performance redefined! With new rotational airflow technology



Technical data	18 V 1.3 kg
Order number:	0 601 9C6 ...
Container volume: 0.7 L	
Filter surface area: 55 cm²	
Max vacuum pressure: 60 mbar	
Max airflow: 10 l/s	
Runtime: 7 m/Ah	
Features: quick release dust-emptying function, washable dust cap	

HEAVY DUTY

Cordless Routers

GKF 12 V-8

World's first professional cordless edge router - newly shaped for perfect control



Technical data	12 V 1.1 kg
Order number:	0 601 6B0 ...
No-load speed: 13000 rpm	
Compatible collet diameters: 6 mm / 8 mm / 1/4"	
Features: macro-depth adjustment, spindle lock, restart protection	

HEAVY DUTY



Cordless Lights

GLI 12 V

Brightness and safety, wherever you work



Technical data	12 V 0.15 kg
Order number:	0 601 4A1 ...
Brightness in: 300 Lm	
Runtime: 180 Min/Ah	
No. of LEDs: 6 pcs	

GLI 18 V-1900

For the best lighting conditions, at any time of day



Technical data	14.4 V / 18 V 1.6 kg
Order number:	0 601 446 ...
Brightness in: 1900 Lm	
Runtime: 100 Min/Ah	
Number of brightness levels: 2	
Features: inclination angle 120°, 5/8" tripod thread	

HEAVY DUTY

Cordless Multi-Cutters

GOP 18 V-28

The cordless powerhouse with fast accessory changes



Technical data	18 V 1.6 kg
Order number:	0 601 8B6 ...
Battery Capacity: 1.5 - 6.0 Ah	
Grip circumference [mm]: 193	

HEAVY DUTY

Cordless Angle Grinders

GWS 180-LI

NO cord, NO brush, NO limits



Technical data	18 V 1.6 kg
Order number:	0 601 9H9 ...
No-load speed:	11000 rpm
Grinding/cutting disc diameter:	115/125 mm
Spindle size:	M 14
Features:	keyless guard



GWS 18 V-10

Heavy duty cordless small angle grinder



Technical data	18 V 2.1 kg
Order number:	0 601 9J4 ...
No-load speed:	9000 rpm
Grinding/cutting disc diameter:	100/115/125 mm
Grinding spindle thread:	100 mm: M10, 115/125 mm: M14
Features:	kickback control, restart protection, soft start, drop control



GWX 18 V-10

Improved power level and tool control in the 18V category - with X-LOCK



X-LOCK



Technical data	18 V 2.0 kg
Order number:	0 601 7B0 ...
No-load speed:	0 - 22000 rpm
Grinding/cutting disc diameter:	125 mm
Cutting depth:	125 mm: 34
Features:	protection guard, 1000 W equivalent, kickback control, drop control, intelligent brake system restart protection

Cordless Straight Grinders

GGG 18 V-LI

The compact professional cordless straight grinder



Technical data	18 V 1.8 kg
Order number:	0 601 9B5 ...
No-load speed:	0 - 22000 rpm
Tool holder:	collet up to 8 mm diameter

Chargers

GAL 12 V-40/ 18 V-40*

Compact and fast chargers



Technical data	12 V - 450 g 14.4 V - 18 V - 550 g
Order number:	1 600 A01 ...
Output current:	4 A
2.0Ah battery 80% / 100% charged in:	24 min / 35 min
3.0Ah battery 80% / 100% charged in:	36 min / 50 min
4.0Ah battery 80% / 100% charged in:	50 min / 65 min

Batteries

ProCORE 18V 4.0Ah/ 8.0Ah/12.0Ah

High performance batteries



Technical data	18 V 515 g / 955 g / 1350 g
Order number:	1 600 A01 ...
Capacity:	4.0Ah, 8.0Ah, 12.0Ah
Features:	coolpack 2.0, charge level indicator, flexible power system

GBA 12 V 1.5Ah/ 2.0Ah/ 4.0Ah

Compact and lightweight batteries 12V



Technical data	12 V
Order number:	1 600 200 ...
Extremely robust:	Fully functional even after a 3 metre drop onto concrete
Features:	Bosch Professional 12V System - battery fits all tools within a voltage class

GBA 18 V 2.0Ah/ 4.0Ah/ 5.0Ah/ 6.0Ah

Compact and lightweight batteries 18V



Technical data	18 V
Order number:	1 600 200 ...
Features:	Bosch Professional 18V System - battery fits all tools within a voltage class
Extremely robust:	Fully functional even after a 3 metre drop onto concrete
Features:	coolpack technology

SDS Plus Hammers

GBH 2-20 RE

The new standard in concrete drilling



Technical data	600 W 2.3 kg
Order number:	0 611 25A ...
Impact energy:	0 - 1.7 J
Max. drilling dia. in (concrete, steel, masonry):	20 mm, 13 mm, 68 mm
Impact rate at rated speed:	0 - 4400 bpm
Rated speed:	0 - 1400 rpm
Features:	SDS plus, speed selection, forward/reverse rotation, rotation control clutch

GBH 2-24 RE/DRE/DFR

The new standard in concrete drilling



Technical data	790 W 2.9/ 2.8 kg
Order number:	0 611 273 ...
Impact energy:	2.7 J
Max. drilling dia. in (concrete, wood, steel, masonry):	24 mm, 30 mm, 13 mm, 68 mm
Rated speed:	0 - 930 rpm
Impact rate at rated speed:	0 - 4200 bpm

GBH 2-26 DRE/ DFR

The fast all-rounder for daily use



Technical data	800 W 2.9 kg
Order number:	0 611 253 ...
Impact energy:	2.7 J
Max. drilling dia. in (concrete, wood, steel, masonry):	26 mm, 30 mm, 13 mm, 68 mm
Rated speed:	0 - 900 rpm
Impact rate at rated speed:	0 - 4000 bpm
Opt. appl. range in concrete:	8 - 16 mm
Features:	SDS plus, rotation control clutch, variable speed, forward/reverse rotation

GBH 2-28 F

Top performance with intelligent KickBack Control



Technical data	880 W 3.1 kg
Order number:	0 611 269 ...
Impact energy:	3.2 J
Max. drilling dia. in (concrete, wood, steel, masonry):	28 mm, 30 mm, 13 mm, 68 mm
Opt. appl. range in concrete:	8 - 16 mm
Rated speed:	0 - 900 rpm
Impact rate at rated speed:	0 - 4000 bpm
Features:	SDS plus, speed selection, forward/reverse rotation, rotation control clutch, chisel function

GBH 3-28 DRE/DFR

Top performance at 20% less vibration



Technical data	800 W 3.6 kg
Order number:	0 611 23A / 0 611 24A ...
Impact energy:	3.1 J
Rated speed:	0 - 900 rpm
Opt. appl. range in concrete:	12 - 18 mm
Max. drilling dia. in (concrete, wood, steel, masonry):	28 mm, 30 mm, 13 mm, 62 mm
Features:	vibration control, SDS plus, forward/reverse rotation, vario-lock, variable speed, rotation control clutch

GBH 4-32 DRE/ DFR

The fastest multi-hammer in the 4 kg class



Technical data	900 W 4.7 kg
Order number:	0 611 332 ...
Impact energy:	4.2 J
Max. drilling dia. in (concrete, wood, steel, masonry):	32 mm, 32 mm, 13 mm, 90 mm
Rated speed:	0 - 800 rpm
Impact rate at rated speed:	0 - 3600 bpm
Opt. appl. range in concrete:	14 - 25 mm
Features:	vibration control, SDS plus, forward/reverse rotation, vario-lock, variable speed, rotation control clutch

SDS Max Hammers

GBH 5-40 D

The powerful hammer with the fastest drilling progress in its class



Technical data	1100 W 6.8 kg
Order number:	0 611 269 ...
Impact energy:	8.5 J
Max. drilling dia. in (concrete, wood, steel, masonry):	40 mm, 40 mm, 90 mm
Opt. appl. range in concrete:	18 - 32 mm
Impact rate at rated speed:	1500 - 2900 bpm

SDS Max Hammers

GBH 5-40 DCE

A fast all-rounder with Vibration Control



Technical data	1150 W 6.8 kg
Order number:	0 611 264 ...
Impact energy: 8.8 J	
Opt. app. range in concrete: 18 - 32 mm	
Impact rate at rated speed: 1500 - 3050 bpm	
Max drilling diameter in (concrete, masonry): 40 mm, 90 mm	
Max drilling diameter in concrete with core cutters: 40 - 90 mm	
Features: vibration control, rotation control clutch, constant speed, turbo power, SDS max, speed selection	

HEAVY DUTY

GBH 8-45 D/ DV*

Powerful 1500 watts with the highest sturdiness



Technical data	1500 W 8.2/ *8.9 kg
Order number:	0 611 265 ...
Impact energy: 12.5 J	
Opt. app. range in concrete: 20 - 40 mm	
Impact rate at rated speed: 1380 - 2720/ *2760 bpm	
Max drilling diameter in (concrete, wood, steel, masonry): 45 mm, 80 mm, 125 mm, 45 mm	
Max drilling diameter in concrete with core cutters: 125 mm	
Features: rotation control clutch, constant speed, SDS max, restart protection, speed selection, *vibration control	

HEAVY DUTY

GBH 12-52 D/ DV*

The most powerful rotary hammer with high-end vibration control system!



Technical data	1700 W 11.5/ *11.9 kg
Order number:	0 611 266 ...
Impact energy: 19 J	
Max drilling diameter in (concrete) 52 mm	
Impact rate at rated speed: 1750 - 2150 bpm	
Opt. appl. range in concrete: 30 - 50 mm	
Max drilling diameter in concrete with core cutters: 150 mm	
Features: rotation control clutch, constant speed SDS max, restart protection, speed selection, *vibration control	

HEAVY DUTY

SDS Max Demolition Hammers

GSH 500

The NEW chipping specialist!



Technical data	1150 W 5.7 kg
Order number:	0 611 338 ...
Impact energy: 7.5 J	
Impact rate at rated speed: 0 - 2900 bpm	
Features: variolock for 12 chisel bits direction setting	

HEAVY DUTY

GSH 5 CE

Unbeatable power at 40% less vibration



Technical data	1150 W 6.2 kg
Order number:	0 611 321 ...
Impact energy: 8.3 J	
Impact rate at rated speed: 1300 - 2900 bpm	
Features: vibration control, electronic regulation of speed and speed selection	

HEAVY DUTY

GSH 7 VC

Perfect for continuous horizontal chiseling!



Technical data	1500 W 8.5 kg
Order number:	0 611 322 ...
Impact energy: 13 J	
Impact rate at rated speed: 2720 bpm	
Features: vibration control, electronic regulation of speed, restart protection and speed selection	

HEAVY DUTY

GSH 11 E

The specialist tool for breakthroughs and demolition work.



Technical data	1500 W 10.1 kg
Order number:	0 611 316 ...
Impact energy: 16.8 J	
Impact rate at rated speed: 900 - 1890 bpm	
Features: vibration control and electronic regulation of speed	

HEAVY DUTY

GSH 11 VC

The strongest 11 kg SDS-max breaker in the world!



Technical data	1700 W 11.4 kg
Order number:	0 611 336 ...
Impact energy: 23 J	
Impact rate at rated speed: 900 - 1700 bpm	
Features: vibration control and electronic regulation of speed	

HEAVY DUTY

GSH 16-28/ 30*

Extreme power for 13 tons of material removal per day.



Technical data	1750 W 17.9/ *16.5 kg
Order number:	0 611 335 ...
Impact energy: 41 J	
Impact rate at rated speed: 1300 bpm	
Toolholder: 28 mm internal hexagon	
Features: vibration control	

HEAVY DUTY

Diamond Drills

GSH 27 VC

The most powerful electric breaker from Bosch



Technical data	2000 W 29.5 kg
Order number:	0 611 30A ...
Impact energy: 62 J	
Impact rate at rated speed: 1000 bpm	
Toolholder: 28 mm internal hexagon	
Features: vibration control	

HEAVY DUTY

GDB 180 WE/ GCR 180*

The compact powerhouse for core drilling up to 180 mm into concrete



Technical data	2000 W 5.2 kg
Order number:	0 601 189 ...
Suitability: wet drilling in concrete	
No-load speed: 900/2800 rpm	
Max. drilling diameter in (concrete, masonry): 180 mm, 180 mm	
Tool holder: 1 1/4" UNC	

Technical data	*9.5 kg
Order number:	0 601 190 ...
Column length: 767 mm	
Drill stroke: 514 mm	

HEAVY DUTY

GDB 350 WE/ GCR 350*

Powerful through concrete - with breakthroughs of up to 350 mm



Technical data	3200 W 11.9 kg
Order number:	0 601 189 ...
Suitability: wet drilling in concrete	
Max. drilling diameter in concrete, masonry: 350 mm	
Tool holder: 1 1/4" UNC	

Technical data	*12.6 kg
Order number:	0 601 190 ...
Column length: 955 mm	
Drill stroke: 580 mm	

HEAVY DUTY

Screwdrivers

GSR 6-25 TE

The powerful drywall screwdriver



Technical data	701 W 1.5 kg
Order number:	0 601 445 ...
Rated torque: 2.3 Nm	
Torque, max. (soft screwdriving applications): 20 Nm	
No-load speed: 0 - 2500 rpm	
Bitholder: 1/4" internal hexagon	

HEAVY DUTY

GSR 6-45 TE

The universal drywall screwdriver



Technical data	701 W 1.4 kg
Order number:	0 601 445t ...
Rated torque: 1.3 Nm	
Torque, max. (soft screwdriving applications): 12 Nm	
No-load speed: 0 - 4500 rpm	
Bitholder: 1/4" internal hexagon	

HEAVY DUTY

Rotary Drills

GBM 6 RE

Precision at full speed



Technical data	350 W 1.2 kg
Order number:	0 601 472 ...
Max. torque: 12.3 Nm	
Max. drilling diameter in (aluminum, wood, steel): 8 mm, 15 mm, 6.5 mm	
Chuck capacity: 6.5 mm	
Keyed chuck capacity: 1.5 - 10 mm	
No-load speed: 0 - 4000 rpm	
Rated speed: 3116 rpm	
Features: forward/reverse rotation, speed selection	

HEAVY DUTY

Rotary Drills

GBM 1000



New Ergonomically designed drill for professional tradesmen

Technical data	350 W 1.2 kg
Order number:	0 601 1A9 ...
Max. drilling diameter in (aluminum, wood, steel):	13 mm, 20 mm, 10 mm
Chuck capacity:	10 mm
No-load speed:	0 - 2500 rpm
Impact rate at no-load speed:	1-10 rpm
Features:	forward/reverse rotation, speed selection

GBM 10 RE



High performance in a compact size

Technical data	600 W 1.7 kg
Order number:	0 601 473 ...
Max. torque:	14.0 Nm
Max. drilling diameter in (aluminum, wood, steel):	10 mm, 25 mm, 10 mm
Chuck capacity:	1 - 10 mm
No-load speed:	0 - 2600 rpm
Rated speed:	0 - 1676 rpm
Features:	forward/reverse rotation, speed selection

GBM 1600 RE



Power and Convenience for mixing & drilling applications

Technical data	850 W 3.0 kg
Order number:	0 601 1B0 ...
Max. torque:	11.0 Nm
Max. drilling diameter in (wood, steel):	40 mm, 16 mm
Chuck capacity:	3 - 16 mm
No-load speed:	0 - 630 rpm
Impact rate at no-load speed:	0 - 48000 bpm
Features:	auxiliary and 360° rotating D handle

GBM 50-2



Precise, efficient and convenient - the ideal solution for metal drilling

Technical data	1200 W 14.7 kg
Order number:	0 601 1B4 ...
Max. drilling diameter in steel:	1.5 - 50 mm
No-load speed:	50 - 250/510 rpm
Features:	PROtection switch, laser target, overload protection

Impact Drills

GSB 10 RE



Compactness and power redefined in this class

Technical data	500 W 1.5 kg
Order number:	0 601 216 ...
No-load speed:	0 - 2600 rpm
Impact rate at no-load speed:	0 - 41600 bpm
Max. drilling diameter in (concrete, wood, steel):	10 mm, 20 mm, 8 mm
Chuck capacity:	1.5 - 10 mm
Drill spindle connecting thread:	3/8" - 24 UNF
Features:	forward/reverse rotation

GSB 550



Powerful and reliable power tool

Technical data	550 W 1.8 kg
Order number:	0 601 1A1 ...
No-load speed:	0 - 2800 rpm
Impact rate at no-load speed:	0 - 41600 bpm
Max. drilling diameter in (concrete, wood, steel, masonry):	13 mm, 25 mm, 10 mm, 13 mm
Chuck capacity:	1.5 - 13 mm
Drill spindle connecting thread:	43
Features:	forward/reverse rotation

GSB 13 RE



Not bigger than a working glove, the most compact impact drill in its class

Technical data	600 W 1.8 kg
Order number:	0 601 217 ...
No-load speed:	0 - 2800 rpm
Max. drilling diameter in (concrete, wood, steel, masonry):	13 mm, 25 mm, 10 mm, 15 mm
Drill spindle connecting thread:	1/2" - 20 UNF
Impact rate at no-load speed:	0-44800 bpm
Chuck capacity:	1.5 - 13 mm
Features:	speed selection, variable speed and forward/reverse rotation

GSB 16 RE



Compact power - The most compact and powerful impact drill in its class

Technical data	701 W 1.9 kg
Order number:	0 601 218 ...
No-load speed:	0 - 3000 rpm
Impact rate at no-load speed:	0 - 48000 bpm
Max. drilling diameter in (concrete, wood, steel, masonry):	16 mm, 30 mm, 13 mm, 18 mm
Chuck capacity:	1.5 - 13 mm
Drill spindle connecting thread:	1/2" - 20 UNF
Features:	forward/reverse rotation

GSB 19-2 RE



The fastest and most versatile tool in its class!

Technical data	850 W 2.6 kg
Order number:	0 601 17B ...
Max. torque:	36/15.5 Nm
No-load speed:	0 - 1000/3000 rpm
Impact rate at no-load speed:	0 - 17000/51000 bpm
Max. drilling diameter in (concrete, wood, steel, masonry):	18/13 mm, 40/25 mm, 13/8 mm, 20/15 mm
Chuck capacity:	1.5 - 13 mm
Drill spindle connecting thread:	1/2" - 20 UNF
Features:	2-speed planetary gearbox, speed selection, rotation control clutch, forward/reverse rotation

GSB 24-2



The powerful tool for toughest applications - now with the intelligent KickBack Control

Technical data	1100 W 2.9 kg
Order number:	0 601 19C ...
Max torque:	40/14.5 Nm
No-load speed:	0 - 900/3000 rpm
Impact rate at no-load speed:	0 - 15300/51000 bpm
Max drilling diameter in (concrete, wood, steel, masonry):	22/13 mm, 40/25 mm, 16/8 mm, 24/16 mm
Chuck capacity:	1.5 - 13 mm
Features:	kickback control, rotation control clutch, forward/reverse rotation, speed selection, 2 gear, soft grip

Mixers


GRW 12 E



The compact tool for mixing various materials of up to 50 kg

Technical data	1200 W 5.3 kg
Order number:	0 601 1A7 ...
No-load speed:	1000 rpm
Stirring mechanism:	Ø 140 mm
Max torque:	12 Nm
Rated speed:	0 - 620 rpm
Features:	speed selection, variable speed

GRW 18-2 E



Powerful tool with 2 gears for mixing various materials of up to 80 kg

Technical data	1800 W 7.2 kg
Order number:	0 601 1A8 ...
No-load speed:	450 - 1050 rpm
Stirring mechanism:	Ø 180 mm
Max torque:	45/19 Nm
Rated speed:	0 - 250/580 rpm
Features:	speed selection, 2 gear, variable speed

Impact Wrenches

GDS 18 E



The versatile and handy tool for the workshop and construction site

Technical data	500 W 3.2 kg
Order number:	0 601 444 ...
Torque, max (hard screwdriving applications):	250 Nm
Torque, max (soft screwdriving applications):	160 Nm
Screw diameter:	M 6 - M 18
Bit holder:	1/2" external square

GDS 24/ 30*



The powerful tool for mechanical engineering

Technical data	800 W/ 920 W 5.7kg / 7.3 kg
Order number:	0 601 434 ...
Torque, max (hard screwdriving applications):	600/ *1000 Nm
Torque, max (soft screwdriving applications):	300/ *500 Nm
Screw diameter:	max. M 24/ *M 30
Bit holder:	3/4" external square/ *1" external square

Concrete Grinders

GBR 15 CA



The compact, lightweight solution for powerful concrete grinding

Technical data	1500 W 2.6 kg
Order number:	0 601 776 ...
Grinding spindle thread:	M 14
No-load speed:	9300 rpm
Grinding head diameter:	125 mm
Features:	constant speed, dust extraction and restart protection

Small Angle Grinders

GWS 6700

A powerful and reliable tool for tradesmen



Technical data	670 W 1.8 kg
Order number:	0 601 375 ...
No-load speed:	12000 rpm
Disc diameter:	115 mm
Grinding spindle thread:	M 14
Features:	protection guard, 2-way switch

GWS 750-100/ 115*

Power and handling - redefined



Technical data	750 W 1.8 kg
Order number:	0 601 394 ...
No-load speed:	11000 rpm
Disc diameter:	100/*115 mm
Grinding spindle thread:	M 10/*M 14
Features:	protection guard, direct cooling and 2-way switch

HEAVY DUTY

GWS 9-115/ P*

Get an incredible grip on safety and power!



Technical data	900 W 1.9/*2.1 kg
Order number:	0 601 396 ...
No-load speed:	0 - 11000/*11500 rpm
Disc diameter:	115 mm
Grinding spindle thread:	M 14
Features:	protection guard, *paddle switch

HEAVY DUTY

GWX 750-115

High performance for universal use



Technical data	750 W 1.8 kg
Order number:	0 601 79C ...
No-load speed:	0 - 11000 rpm
Disc diameter:	115 mm
Grinding spindle thread:	M 14
Features:	protection guard, restart protection

X-LOCK

HEAVY DUTY

GWS 11-125/ P*

The most durable tool in its class



Technical data	1100 W 2.2/*2.3 kg
Order number:	0 601 79D/ *0 601 792 ...
No-load speed:	11500 rpm
Disc diameter:	125 mm
Wire cup brush, diameter:	75 mm
Features:	2-way switch, direct cooling, protection guard and *PROtection switch

HEAVY DUTY

GWS 1400

The handy powerhouse



Technical data	1400 W 2.2 kg
Order number:	0 601 824 ...
No-load speed:	11000 rpm
Disc diameter:	125 mm
Wire cup brush, diameter:	70 mm
Grinding spindle thread:	M 14
Features:	protection guard, direct cooling, constant speed, auxiliary handle and soft start

HEAVY DUTY

GWX 14-125

Tough grinding performance with versatility for regular use in the 1400 W category - with X-LOCK



Technical data	1400 W 2.3 kg
Order number:	0 601 787 ...
No-load speed:	2800 - 11000 rpm
Disc diameter:	125 mm
Wire cup brush diameter:	75 mm
Features:	protection guard, direct cooling, constant speed, soft start

X-LOCK

HEAVY DUTY

GWS 17-125 CIE

Maximum productivity and best user protection



Technical data	1700 W 2.4 kg
Order number:	0 601 79H ...
No-load speed:	2800 - 11500 rpm
Disc diameter:	125 mm
Wire cup brush, diameter:	75 mm
Grinding spindle thread:	M 14
Features:	constant speed, speed selection, direct cooling, protection guard, vibration control, restart protection, kickback control, soft start, overload protection and 2-way switch.

HEAVY DUTY

Large Angle Grinders

GWS 2000-180/ 230*

Performance that meets reliability and your budget



Technical data	2000 W 5.0/*5.3 kg
Order number:	0 601 887 .../ *0 601 888 ...
No-load speed:	0 - 8500/*6500
Disc diameter:	180/*230 mm
Main handle:	straight
Grinding spindle thread:	M 14
Features:	tri-control switch, protection guard

GWS 2200-180/ 230 H*

Highest power per kilo!



Technical data	2200 W 5.0/*5.2 kg
Order number:	0 601 88C/ *0 601 88C ...
No-load speed:	8500/*6500 rpm
Disc diameter:	180/*230 mm
Grinding spindle thread:	M 14
Features:	tri-control switch, version with PROtection switch available

HEAVY DUTY

GWS 22-230 H

A powerful tool for the toughest jobs!



Technical data	2200 W 5.2 kg
Order number:	0 601 882 ...
No-load speed:	6500 rpm
Disc diameter:	230 mm
Grinding spindle:	M 14
Features:	protection guard and tri-control switch

HEAVY DUTY

GWS 24-180/ 230 H*

Great power, less weight, more control



Technical data	2400 W 5.0/*5.1 kg
Order number:	0 601 883/ *0 601 884 ...
No-load speed:	8500/*6500 rpm
Disc diameter:	180/*230 mm
Grinding spindle thread:	M 14
Features:	spindle lock, protection guard and tri-control switch

HEAVY DUTY

Wall Chasers

GWS 26-180/ 230 H*

Superior efficiency solution



Technical data	2600 W 6.0/6.1 kg
Order number:	0 601 855/ *0 601 856 ...
No-load speed:	8500/*6500 rpm
Disc diameter:	180/*230 mm
Grinding spindle thread:	M 14
Main handle:	shaft/straight
Features:	click & clean system, *protection guard, *spindle lock, *restart protection, *tri-control switch

HEAVY DUTY

GNF 35 CA

The durable tool with Constant Electronic



Technical data	1400 W 4.7 kg
Order number:	0 601 621 ...
Adjustable groove depth:	0 - 35 mm
Groove width:	3 - 39 mm
No-load speed:	9300 rpm
Disc diameter:	190 mm
Features:	constant speed, soft start, dust extraction and click & clean system

HEAVY DUTY

GNF 65 A

The powerful tool with lots of comfort



Technical data	2400 W 8.4 kg
Order number:	0 601 368 ...
Adjustable groove depth:	20 - 65 mm
Groove width:	3 - 40 mm
No-load speed:	5200 rpm
Disc diameter:	230 mm
Features:	constant speed, soft start, dust extraction, click & clean system, and spindle lock

HEAVY DUTY

NEW! X-LOCK

The ultimate changing system for grinders.

X-LOCK is a new 2-piece changing system to switch angle grinder accessories with just one click. The X-shaped interface of the grinders head and the accessory allows easy and effortless mounting. A world's first by Bosch Professional.



XTRA **CONVENIENT**

Easy change of grinder accessories without any losable parts or additional mounting equipment – up to 5 times faster compared to conventional changing solutions.

XTRA **COMPREHENSIVE**

We offer a huge range of grinders and accessories to cope with all kinds of tasks.

XTRA **RELIABLE**


Directional accessories like diamond discs can't be incorrectly mounted thanks to the innovative X-LOCK System.

EASIEST CHANGE

CONVENIENT

To attach, push the accessory on the X-shaped interface and get started. To release, simply pull the lever and remove the accessory with low force, even if it is jammed.

ATTACH

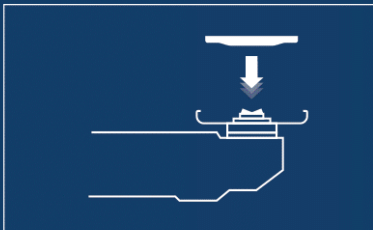

Centre disc



Press until click

RELEASE



Open the lock



Release disc



Straight Grinders

GGG 5000/ L*

Superior handling for heavy duty job



Technical data	500 W 1.0/ *1.4 kg
Order number:	0 601 223/ *0 601 224 ...
No-load speed:	33000 rpm
Toolholder: collets up to 8 mm	
Spindle collar diameter:	41/43.5 mm

GGG 28 C/ LC*

Perfect handling for tough grinding applications



Technical data	650 W 1.4/ *1.6 kg
Order number:	0 601 221 ...
No-load speed:	30000 rpm
Toolholder: collets up to 8 mm	
Spindle collar diameter:	43 mm
Features:	constant electronic and speed, kickback control and direct cooling, overload protection, soft start

GGG 8 CE

The specialist for surfaces



Technical data	750 W 1.7 kg
Order number:	0 601 222 ...
No-load speed:	2500 - 8000 rpm
Toolholder: collets up to 8 mm	
Spindle collar diameter:	43 mm
Features:	constant speed, speed selection, kickback control, soft start, overload protection, direct cooling

Polishers

GPO 950

First vertical polisher from Bosch!



Technical data	950 W 2.3 kg
Order number:	0 601 3A2 ...
No-load speed:	600 - 2100 rpm
Polishing sponge, diameter:	180 mm
Grinding spindle thread:	M 14
Features:	variable speed, constant speed and soft start

GPO 14 CE

The handy tool for highly polished results



Technical data	1400 W 2.5 kg
Order number:	0 601 3B9 ...
No-load speed:	750 - 3000 rpm
Grinding spindle thread:	M 14
Diameter (rubber sanding plate, wire cup brush, cup wheel, polishing sponge):	180 mm, 100 mm, 180 mm, 160 mm
Features:	constant speed, direct cooling, restart protection, overload protection, speed selection and soft start

Bench Grinders

GBG 60-20

The powerful and sturdy tool for toughest applications



Technical data	600 W 15.0 kg
Order number:	0 601 27A ...
Grit:	24, 60
Grinding wheel (diameter,width,bore):	200 mm, 25 mm, 32 mm
No-load speed:	3600 rpm

Benchtop Cut-off Saws

GCO 220

Cuts steel like butter. Power redefined



Technical data	2200 W 14 kg
Order number:	0 601 B37 ...
Cutting capacity at 0° (rectangle, square, L-profile):	100 mm x 196 mm, 129 mm x 129 mm, 130 mm x 130 mm
Cutting disc diameter (disc, bore):	355 mm, 25.4 mm
No-load speed:	0 - 3800 rpm

GCO 240

The new benchmark in cutting power and efficiency



Technical data	2400 W 17 kg
Order number:	0 601 B38 ...
No-load speed:	3800 rpm
Cutting capacity at 0° (rectangle, square, L-profile):	100 x 196 mm, 119 x 119 mm, 130 x 130 mm
Cutting disc, diameter (disc, bore):	355 mm, 25.4 mm

GCD 12 JL

Precise results, less rework and up to 100% spark-free



Technical data	2000 W 20.0 kg
Order number:	0 601 B28 ...
No-load speed:	1500 rpm
Cutting capacity at 0° (rectangle, square, L-profile):	158 mm x 80 mm, 100 mm x 100 mm, 110 mm x 110 mm
Features:	soft start

Benchtop Mitre Saws

GCM 10 MX

Engineered for precise aluminium cutting



Technical data	1700 W 14.1 kg
Order number:	0 601 B29 ...
Cutting capacity at 0° and 45° incline:	89 mm x 89 mm, 96 mm x 67 mm
No-load speed:	4800 rpm
Saw, diameter (blade,bore):	255 mm, 25.4 mm
Mitre setting:	47°L / 52°R

GCM 12 SDE

High cutting capacity and variable speed for a wide variety of applications



Technical data	1800 W 28.6 kg
Order number:	0 601 B23 ...
Cutting capacity at 0° and 45° incline:	85 mm x 370 mm, 60 mm x 360 mm
No-load speed:	3100 - 4000 rpm
Saw, diameter (blade, bore):	305 mm, 30 mm
Mitre setting:	52°L / 60°R
Features:	click & clean system, dust extraction, intelligent brake system, soft start, speed selection, bevel detent turret and precision laser

GCM 12 GDL

Unmatched cutting smoothness and durable precision



Technical data	1800 W 32.1 kg
Order number:	0 601 B23 ...
Cutting capacity at 0° and 45° incline:	104 mm x 341 mm, 51 mm x 341 mm
No-load speed:	3800 rpm
Saw, diameter (blade, bore):	305 mm, 30 mm
Mitre setting:	47°L / 60°R
Features:	spindle lock, dust extraction, intelligent brake system, and soft start

Benchtop Table Saws

GTM 12 JL

Multi-talented tool with 100% precision



Technical data	1800 W 21.0 kg
Order number:	0 601 B15 ...
No-load speed:	3800 rpm
Max. cutting height of table saw:	51 mm
Saw, diameter (blade,bore):	305 mm, 30 mm
Incline setting:	47°L/2°R
Cutting capacity at (0° and 45°):	95 x 150 mm, 95 x 90 mm
Features:	spindle lock, click & clean system, soft start and dust extraction

GTS 10 J

Extremely compact and powerful



Technical data	1800 W 27.0 kg
Order number:	601 B30 ...
No-load speed:	3650 rpm
Table size:	642 mm x 634 mm
Saw, diameter (blade,bore):	254 mm, 30 mm
Incline setting:	47°L/2°R
Max cutting capacity (right, left):	635 mm, 255 mm
Features:	spindle lock, double insulation, click & clean system, soft start, dust extraction

GTS 10 XC

A powerful motor with constant electronic for the toughest applications



Technical data	2100 W 35.0 kg
Order number:	0 601 B30 ...
No-load speed:	3200 rpm
Table size:	640 mm x 705 mm
Saw, diameter (blade,bore):	254 mm, 30 mm
Incline setting:	47°L/1°R
Max. cutting capacity (right,left):	635 mm, 250 mm
Features:	constant speed, double insulation, click & clean system, intelligent brake system, spindle lock, soft start and dust extraction

Diamond/Stone Cutters

GDC 140



Technical data	1400 W 2.9 kg
Order number:	0 601 3A0 ...
No-load speed: 13200 rpm	
Disc diameter: 115 mm	
Cutting depth: 35 mm	

GDM 13-34



More cutting power with the longest lifetime in class

Technical data	1300 W 2.8 kg
Order number:	0 601 36A ...
No-load speed: 12000 rpm	
Saw, diameter (blade, bore): 110 mm, 20 mm	
Cutting depth (90° and 45°): 34 mm and 22 mm	
Features: constant speed, soft start, dust extraction, click & clean system, spindle lock	

HEAVY DUTY

Jigsaws

GST 700



Beyond expectations. Cut faster with ease.

Technical data	500 W 2.1 kg
Order number:	0 601 2A7 ...
Stroke rate at no-load: 1450 - 3200 spm	
Saw, stroke length: 20 mm	
Cutting depth in (wood, aluminium, non-alloyed steel): 70 mm, 10 mm, 6 mm	
Features: pendulum action, double insulation, speed selection	

GST 8000 E

The Bosch professional jigsaw with the best cost to power ratio!



Technical data	710 W 2.5 kg
Order number:	0 601 58H ...
Stroke rate at no-load: 800 - 3100 spm	
Cutting depth in (wood, aluminium, non-alloyed steel): 80 mm, 20 mm, 10 mm	
Features: SDS system, speed selection and pendulum action	

GST 90 BE

Top class convenience at an affordable price!



Technical data	650 W 2.6 kg
Order number:	0 601 58F...
Stroke rate at no-load: 500 - 3100 spm	
Cutting depth in (wood, aluminium, non-alloyed steel): 90 mm, 20 mm, 10 mm	
Features: SDS system, pendulum action, click & clean system, speed selection and dust extraction	

HEAVY DUTY

GST 150 BCE

Robust and powerful



Technical data	780 W 2.7 kg
Order number:	0 601 513 ...
Stroke rate at no-load: 500 - 3100 spm	
Cutting depth in (wood, aluminium, non-alloyed steel): 150 mm, 20 mm, 10 mm	
Features: SDS system, pendulum action, click & clean system, constant speed, speed selection and dust extraction	

HEAVY DUTY

GST 650

High-quality Bosch standards within reach



Technical data	450 W 1.9 kg
Order number:	0 601 5A8 ...
Saw, stroke length: 18 mm	
Stroke rate at no load: 800 - 3100 spm	
Cutting depth in (wood, aluminum, non-alloyed steel): 65 mm, 10 mm, 3 mm	
Features: double insulation, variable speed	

Circular Saws

GKS 140

High performance and resistance for rough cutting



Technical data	1400 W 3.7 kg
Order number:	0 601 6B3 ...
No-load speed: 6000 rpm	
Saw diameter (blade, bore): 184 mm, 20 mm	
Cutting depth at 90° and 45°: 64 mm, 45 mm	

HEAVY DUTY

GKS 190

Speed and comfort redefined in its class for continuous use



Technical data	1400 W 4.1 kg
Order number:	0 601 6B3 ...
No-load speed: 0 - 5200 rpm	
Saw, diameter (blade, bore): 184 mm, 20 mm	
Cutting depth at (90° and 45°): 67 mm and 48 mm	
Features: air blower and dust extraction	

HEAVY DUTY

GKS 9

The most powerful circular saw in its class!



Technical data	2050 W 7.6 kg
Order number:	0 601 5A2 ...
No-load speed: 5300 rpm	
Saw, diameter (blade, bore): 235 mm, 25.4 mm	
Cutting depth at (90° and 45°): 85 mm and 65 mm	
Features: air blower and dust extraction	

HEAVY DUTY

Reciprocating Saws

GSA 120

Cut more with the latest transmission, ultra durable reciprocating saw



Technical data	1200 W 3.7 kg
Order number:	0 601 6B1 ...
Stroke rate at no load: 0 - 3000 spm	
Saw stroke length: 29 mm	
Cutting depth in (wood, metal): 220 mm, 20 mm	
Features: variable speed, double insulation	

GSA 1300 PCE

Lowest vibration in its class



Technical data	1300 W 4.1 kg
Order number:	0 601 64E ...
Stroke rate at no load: 0 - 2900 spm	
Cutting depth in (wood, metal): 230 mm, 20 mm	
Saw, stroke length: 28 mm	
Features: speed selection, SDS system, pendulum action, vibration control and constant speed	

HEAVY DUTY

Routers

GKF 550

Fast and quality trimming is in your hand!



Technical data	550 W 1.4 kg
Order number:	0 601 6A0 ...
No-load speed: 33000 rpm	
Collet diameter: 6 mm	

GOF 1600 CE

The powerful and precise plunge router with LED illumination



Technical data	1600 W 5.8 kg
Order number:	0 601 624 ...
No-load speed: 10000 - 25000 rpm	
Max. router cage stroke: 76 mm	
Blitholder: 8 - 12.7 mm	
Features: click & clean system, fine depth adjustment, spindle lock, dust extraction, speed selection and soft start handle trigger switch	

HEAVY DUTY

Planers

GHO 6500

Powerful planer with a max. 2.6 mm cutting depth!



Technical data	650 W 2.8 kg
Order number:	0 601 596 ...
Adjustable rebating depth: 9 mm	
Cutting depth: 2.6 mm	
Planing width: 82 mm	
No-load speed: 16500 rpm	

Orbital Sanders

GHO 26-82 D

The small, handy planer for all kinds of adjustment work on site



Technical data	710 W 2.8 kg
Order number:	0 601 5A4 ...
Cutting depth: 2.6 mm	
Planing width: 82 mm	
Adjustable rebating depth: 9 mm	
No-load speed: 18000 rpm	

HEAVY DUTY

GSS 1400

Fatigue free and robust clamping design for long hours sanding job!



Technical data	180 W 1.3 kg
Order number:	0 601 2A2 ...
Oscillating circuit diameter: 1.6 mm	
No-load orbital stroke rate: 24000 opm	
No-load speed: 12000 rpm	
Sanding sheet for clamping, length: 140 mm, width: 115 mm	

GSS 2300

Robust design for easy, fatigue-free sanding over long hours



Technical data	190 W 1.5 kg
Order number:	0 601 298 ...
Oscillating circuit diameter: 2.0 mm	
No-load orbital stroke rate: 0 - 24000 opm	
No-load speed: 12000 rpm	
Sanding sheet for clamping, length: 230 mm, width: 93 mm	

Random Orbit Sanders

GSS 280 AE

The sander for extremely high surface quality



Technical data	330 W 2.6 kg
Order number:	0 601 293 ...
Oscillating circuit diameter: 2.4 mm	
No-load orbital stroke rate: 11000 - 22000 opm	
No-load speed: 5000 - 11000 rpm	
Sanding sheet for clamping, length: 280 mm, width: 115 mm	
Features: speed selection, click & clean system, dust extraction and hook-and-loop fastening	

HEAVY DUTY

GEX 125-1 AE

Comfortable sanding in any work position



Technical data	250 W 1.3 kg
Order number:	0 601 387 ...
Sanding pad diameter: 125 mm	
Oscillating circuit diameter: 2.5 mm	
Orbital stroke rate: 15000 - 24000 opm	
No-load speed: 7500 - 12000 rpm	
Features: speed selection, click & clean system, dust extraction and hook-and-loop fastening	

HEAVY DUTY

GEX 34-150

The proven performance of the corded GEX range, now with our game-changing 'multi-hole' pad



Technical data	340 W 2.1 kg
Order number:	0 601 372 ...
Sanding pad diameter: 150 mm	
No-load speed: 4500-12000 rpm	
Oscillating circuit diameter: 4 mm	
Features: multi-hole pad, speed selection, click & clean system, dust extraction	

HEAVY DUTY

Multi-Cutters

GOP 30-28

The all-rounder for easily completing projects



Technical data	300 W 1.5 kg
Order number:	0 601 237 ...
No-load oscillation: 8000 - 20000 opm	
Oscillation angle on left and right: 1.4°	
Features: constant speed, soft grip	

HEAVY DUTY

GOP 55-36

More applications - more performance!



Technical data	550 W 1.6 kg
Order number:	0 601 231 ...
No-load oscillation: 8000 - 20000 opm	
Oscillation angle on left and right: 1.8°	
Features: constant speed, soft grip, snap-in function	

HEAVY DUTY

Wet/Dry Dust Extractors

GAS 12-25 PL

Superior suction power with innovative self-cleaning technology



Technical data	1350 W 9 kg
Order number:	0 601 97C ...
Max. ventilating pressure: 200 mbar	
Max. airflow: 65 l/sec	
Container volume, gross: 25 l	
Dust class: L	
Features: click & clean system, patented "selfcleaning" technology cleans filter automatically	

HEAVY DUTY

GAS 35 L SFC+

The mobile wet/dry dust extractor with the most convenient semi-automatic filter cleaning



Technical data	1380 W 11.6 kg
Order number:	0 601 9C3 ...
Max. ventilating pressure: 254 mbar	
Container volume, gross: 35 l	
Dust class: L	
Max. airflow: 74 l/sec	
Features: click & clean system and SFC (semi-automatic filter cleaning plus)	

HEAVY DUTY

GAS 55 M AFC

The versatile wet/dry dust extractor with automatic filter cleaning and large tank volume!



Technical data	1380 W 16.2 kg
Order number:	0 601 942 ...
Max. ventilating pressure: 254 mbar	
Max. airflow: 74 l/sec	
Container volume, gross: 55 l	
Dust class: M	
Features: click & clean system and AFC (automatic filter cleaning)	

HEAVY DUTY

Blowers

GBL 620

Mind-blowing power in its class



Technical data	620 W 1.7 kg
Order number:	0 601 980 ...
No-load speed: 0 - 16000 rpm	
Volumetric flow rate: 3.5 m³/min	

HEAVY DUTY

Heat Guns

GBL 800 E

A handy tool for blowing and dust extracting



Technical data	820 W 1.8 kg
Order number:	0 601 980 ...
No-load speed: 16000 rpm	
Volumetric flow rate: 4.5 m³/min	

HEAVY DUTY

GHG 16-50

Entry-level heat gun with true ease of use



Technical data	1600 W 0.52 kg
Order number:	0 601 2A6 ...
Working temperature: 300 - 500 °C	
Airflow: 240 - 450 l/min	
Control, airflow: 2-stage	
Features: speed selection, constant speed	

HEAVY DUTY

GHG 23-66

Total heat and airflow control for demanding applications



Technical data	2300 W 0.67 kg
Order number:	0 601 2A6 ...
Working temperature: 50 - 650 °C	
Airflow: 150 - 500 l/min	
Control, airflow: continuously variable	
Features: speed selection, constant speed	

HEAVY DUTY

Measuring: Range Finders

GLM 20

Simple, small,
fast and accurate!



Technical data	0.13 kg
Order number:	0 601 072 ...
Measurement range: 0.15 - 20 m	
Measurement accuracy: ± 3.0 mm	
Units of measurement: m/cm, ft/inch	

GLM 30

Distance measurement
– easy and compact
for professionals!



Technical data	0.09 kg
Order number:	0 601 072 ...
Measurement range: 0.15 - 30 m	
Measurement accuracy: ± 2 mm	
Units of measurement: m/cm	

GLM 40

All relevant functions
in a compact design!



Technical data	0.09 kg
Order number:	0 601 072 ...
Measurement range: 0.15 - 40 m	
Measurement accuracy: ± 1.5 mm	
Units of measurement: m/cm, ft/inch	
Memory capacity: 10 values	

GLM 50 C

The smart solution
for measuring and
documenting



Technical data	0.1 kg
Order number:	0 601 072 ...
Measurement range: 0.05 - 50 m	
Measurement accuracy: ± 1.5 mm	
Units of measurement: mm/m	
Memory capacity: 30 values	

GLM 80

The high-tech solution
for convenient
measurement



Technical data	0.14 kg
Order number:	0 601 072 ...
Measurement range: 0.05 - 80 m	
Measurement accuracy: ± 1.5 mm	
Units of measurement: m/cm/mm	
Memory capacity: 20+1 values	

GLM 120 C

The smart solution for
measuring and documenting
surroundings, even outdoors!



Technical data	0.21 kg
Order number:	0 601 072 ...
Measurement range: 0.08 - 120 m	
Measurement accuracy: ± 1.5 mm	
Incline measurement: 0 - 360° (4 x 90°)	
Units of measurement: m/cm/mm, ft/inch/ft-inch	
Memory capacity: 50 values	

Measuring: Inclino-meters

GLM 250 VF

The laser measure
with the longest range!



Technical data	0.24 kg
Order number:	0 601 072 ...
Measurement range: 0.05 - 250 m	
Measurement accuracy: ± 1 mm	
Units of measurement: m/cm/mm	
Memory capacity: 30 values	

GIM 60

Precise digital inclinometer
with an audible signal at 0° and 90°



Technical data	0.77 kg
Order number:	0 601 076 ...
Measurement range: 0 - 360° (4 x 90°)	
Measurement accuracy: ± 0.057° = ± 1 mm/m	
Units of measurement: °, %, mm/m	
Length: 60 cm	

GIM 60 L

Precise digital inclinometer
with an audible signal at 0° and 90°



Technical data	0.77 kg
Order number:	0 601 076 ...
Measurement range: 0 - 360° (4 x 90°)	
Measurement accuracy: 0°/90° ± 0.05°	
Units of measurement: °, %, mm/m	
Length: 60 cm	

Measuring: Angle Finders

GIM 120

Longer for maximum precision



Technical data	1.3 kg
Order number:	0 601 076 ...
Measurement range: 0 - 360° (4 x 90°)	
Measurement accuracy: ± 0.057° = ± 1 mm/m	
Units of measurement: °, %, mm/m/accuracy; ± 0.057° = ± 1 mm/m	
Length: 120 cm	

GAM 220 MF

Fast calculation of mitre angles



Technical data	1.2 kg
Order number:	0 601 076 ...
Measurement range: 0 - 220°	
Measurement accuracy, angles: ± 0.1°	
Arm length: 40 cm	

GAM 270 MFL

Angle meter and inclinometer with
laser-accurate transfer



Technical data	1.7 kg
Order number:	0 601 076 ...
Measurement range: 0 - 270°	
Measurement accuracy, angles: ± 0.1°	
Arm length: 60 cm	

Measuring Wheels

GWM 32

The lightweight, handy
measuring wheel



Technical data	1.4 kg
Order number:	0 601 074 ...
Wheel diameter: 318.5 mm (1m)	
Max. measured value: 9999.99 m	
Measurement accuracy: ± 1 dm/100 m	
Material: aluminium	

GWM 40

The robust measuring
wheel for jobsite use



Technical data	3.3 kg
Order number:	0 601 074 ...
Wheel diameter: 389.1 mm (1.22 m)	
Max. measured value: 9999.99 m	
Measurement accuracy: ± 5 cm/100 m	
Material: steel	

Levelling: Line Lasers

GLL 2

The compact cross line laser
for professionals



Technical data	0.25 kg
Order number:	0 601 063 ...
Number of lasers: 2	
Working range: 10 m	
Levelling accuracy: ± 0.3 mm/m	
Self-levelling range: ± 4°	

GLL 3X



Compact 3-line laser:
the versatile solution
for indoor jobs

Technical data	0.5 kg
Order number:	0 601 063 ...
Number of Lasers: 2	
Working range: 15 m	
Levelling accuracy: ± 0.5 mm/m	
Self-levelling range: $\pm 4^\circ$	

GLL 3-50



A simple and convenient solution
for all short distance levelling
and transfer applications!

Technical data	0.94 kg
Order number:	0 601 063 ...
Number of lasers: 3	
Working range w/ receiver: 50 m	
Working range w/out receiver: 10 m	
Levelling accuracy: ± 0.3 mm/m	
Self-levelling range: $\pm 4^\circ$	



GLL 3-80/ C*



Visibility on a
new level in 3 x 360°

Technical data	0.82 kg
Order number:	0 601 063 ...
Number of Lasers: 3	
Working range w/ receiver: 120 m	
Working range w/out receiver: 30 m	
Levelling accuracy: ± 3 mm/m	
Self-levelling range: $\pm 4^\circ$	
*C=Connect (Blue tooth)	



GLL 3-80 G/ CG*



3 x 360° bold green lines
for optimal visibility.
Simply connected.

Technical data	0.82 / 0.9 kg
Order number:	0 601 063 ...
Working range w/o receiver up to 30 m	
Working range with receiver up to 120 m	
Levelling accuracy: ± 0.3 mm/m	
Self-levelling range: $\pm 4^\circ$	



Leveling: Tile Lasers

GTL 3



Fast tile laying due to additional line at 45°

Technical data	0.44 kg
Order number:	0 601 015 ...
Number of lasers: 2	
Working range: 20 m	
Levelling accuracy: ± 0.2 mm/m	



Leveling: Point Lasers

GPL 5



Makes levelling work easier
and fast than ever before!

Technical data	0.25 kg
Order number:	0 601 066 ...
Number of Laser points: 5	
Working range: 30 m	
Levelling accuracy: ± 0.3 mm/m	
Self-levelling range: $\pm 5^\circ$ longitudinal axis, $\pm 3^\circ$ traverse axis	



Leveling: Combi Lasers

GCL 2-15/ G*



Compact and versatile
or all short-distance
levelling applications

Technical data	0.33 kg
Order number:	0 601 066 ...
Line color: red/ green	
Number of laser points and lines: 2 and 2	
Working range: 15 m	
Levelling accuracy: ± 0.3 mm/m	
Plumb point accuracy: ± 0.7 mm/m	



GCL 2-50 C/ CG*



A robust and
easy device with
good visibility

Technical data	0.6 kg
Order number:	0 601 066 ...
Line color: red/ green	
Number of laser points and lines: 2 and 2	
Working range: 15 m	
Levelling accuracy: ± 0.3 mm/m	
Plumb point accuracy: ± 0.7 mm/m	



GCL 25



The easy solution for all levelling and transfer
jobs over short distances

Technical data	0.6 kg
Order number:	0 601 066 ...
Number of laser points and lines: 5 and 2	
Working range: 30 m (points) and 10 m (lines)	
Self-levelling range: $\pm 4^\circ$	



Leveling: Rotary Lasers

GRL 300 HV/ G*



Easy handling with
horizontal and vertical
self-levelling

Technical data	1.8 kg
Order number:	0 601 061 ...
Line color: red/ green	
Working range w/ receiver: 300 m	
Working range w/out receiver: 60 m	
Levelling accuracy: ± 0.1 mm/m	
Self-levelling range: $\pm 5^\circ$ ($\pm 8^\circ$)	



GRL 400 H



The easy-to-operate
rotation laser
for outdoor use

Technical data	2 kg
Order number:	0 601 061 ...
Line color: red	
Working range w/ receiver: 400 m	
Working range w/out receiver: 20 m	
Levelling accuracy: ± 0.8 mm/m	
Self-levelling range: $\pm 8^\circ$ ($\pm 5^\circ$)	



GRL 600 CHV



Get accurate results and save time
with the new GRL 600 CHV -
perfect for heavy-duty jobs

Technical data	4.2 kg/ 4.8 kg
Order number:	0 601 061 ...
Weight w/ Li (4.0Ah ProCore) battery: 4.2 kg	
Weight w/ Alkaline batteries: 4.8 kg	
Line color: red	
Working range w/ receiver: ± 600 m	
Working range w/out receiver: 60 m	
Levelling accuracy: ± 0.05 mm/m, ± 0.1 mm/m vertical	
Self-levelling range: $\pm 8^\circ$ ($\pm 5^\circ$)	



Leveling: Opticals

GOL 26 D



Extremely robust - ideal
for outdoor use

Technical data	1.5 kg
Order number:	0 601 068 ...
Magnification: 26x	
Working range: up to 100 m	
Levelling accuracy: 1.6 mm at 30 m	



GOL 32 D



Robust and reliable

Technical data	1.5 kg
Order number:	0 601 068 ...
Magnification: 32x	
Working range: up to 120 m	
Levelling accuracy: 1 mm at 30 m	



Detection: Wall Scanners

GMS 100 M



The preferred
detector in its class

Technical data	0.26 kg
Order number:	0 601 081 ...
Detectable materials: ferrous and non ferrous metals and live wires	
Max detection depth: 100 mm	



GMS 120

The preferred multi-detector in its class



Technical data 0.27 kg
Order number: 0 601 081 ...
 Detectable materials: ferrous and non ferrous metals, wooden studs and live wires
 Max detection depth: 120 mm



D-TECT 120

The intuitive radar scanner for all materials



Technical data 0.5 kg
Order number: 0 601 081 ...
 Detectable materials: water-filled plastic pipes, ferrous and non ferrous metals, wooden studs and live wires
 Max detection depth: 120 mm
 Accuracy: ± 10 mm



D-TECT 150 SV

The specialist for finding objects in difficult conditions



Technical data 0.56 kg
Order number: 0 601 010 ...
 Detectable materials: plastic pipes, ferrous and non ferrous metals, wooden studs and live wires
 Max detection depth: 150 mm
 Accuracy: ± 5 mm



GIC 120 C

Convenient inspection and documentation of hard-to-reach areas



Technical data 0.64 kg
Order number: 0 601 241 ...
 Number of LED lighting stages: 3
 Battery voltage: 12 V
 Diameter of camera head: 8.5 mm
 Length of camera cable: 120 cm



GTC 400 C

Visualise temperature differences within seconds and document results with ease!



Technical data 0.54 kg
Order number: 0 601 083 ...
 Measurement range: -10°C ... +400°C
 Measuring accuracy: ± 3.0°C
 Working range: 0.1 - 5 m
 Infrared resolution: 160 x 120
 Internal memory storage: 500 pictures



GIS 1000 C

Accurate measurement and easy recording of temperature and moisture levels



Technical data 0.56 kg
Order number: 0 601 083 ...
 Measurement range: -40°C ... +1000°C
 Measuring accuracy: ± 1.0°
 Working range: 0.1 - 5 m



Find us on Facebook



Prepared May 2020 by Robert Bosch Middle East FZE
 Technical specifications are subject to change.
 The presented photos may differ from reality.
 We are not responsible for errors during printing.